



H3FF 315A-1100A

Class of operation: aR

保护特性: aR



Standard/ 标准: IEC 60269-4, GB/T 13539.4, UL 248-13

INTERRUPTING CAPACITY/ 分断能力:


100,000 A at 1250V AC (IEC 315A-1100A)
50,000 A at 1000V DC (UL 315A-1100A)

TECHNICAL PARAMETERS/ 技术参数:

PART NO. 目录编号			额定电流 Rated Current	额定电压 Rated Voltage	SAFETY APPROVALS 安全认证		
Type-A Type center Indicator for micro	Type-B Type top Indicator for micro	Type-C Type Visual Indicator			CCC	TUV	CE
H3FF315	H3FF315B	H3FF315C	315A	1250V AC 1000V DC	●	●	●
H3FF350	H3FF350B	H3FF350C	350A		●	●	●
H3FF400	H3FF400B	H3FF400C	400A		●	●	●
H3FF450	H3FF450B	H3FF450C	450A		●	●	●
H3FF500	H3FF500B	H3FF500C	500A		●	●	●
H3FF550	H3FF550B	H3FF550C	550A		●	●	●
H3FF630	H3FF630B	H3FF630C	630A		●	●	●
H3FF700	H3FF700B	H3FF700C	700A		●	●	●
H3FF800	H3FF800B	H3FF800C	800A		●	●	●
H3FF900	H3FF900B	H3FF900C	900A		●	●	●
H3FFH900	H3FFH900B	H3FFH900C	900A		●	●	●
H3FF1000	H3FF1000B	H3FF1000C	1000A		●	●	●
H3FFH1000	H3FFH1000B	H3FFH1000C	1000A		●	●	●
H3FF1100	H3FF1100B	H3FF1100C	1100A		●	●	●
H3FFH1100	H3FFH1100B	H3FFH1100C	1100A		●	●	●

- DENOTES FOR APPROVAL ● 表示已取得安全认证
- DENOTES FOR PENDING ○ 表示正在申请安全认证


H3FF 平均 I-T 曲线图 (仅供参考) AVERAGE I-T CHARACTERISTICS CURVE (FOR REFERENCE ONLY)

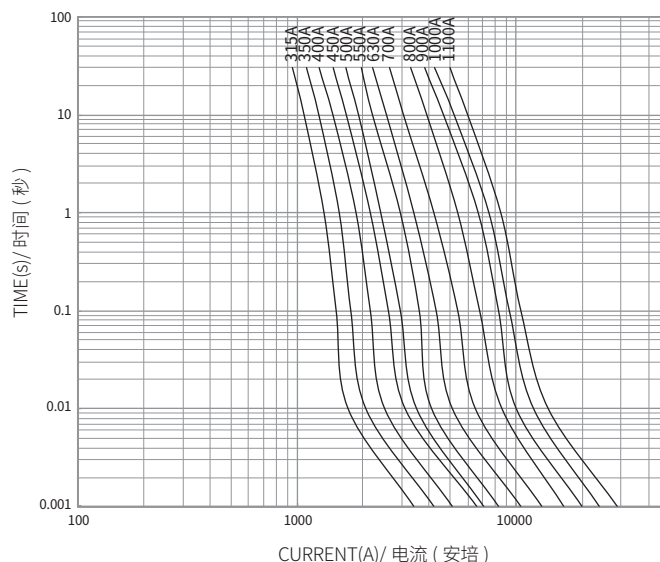


Dimensions/ 尺寸:

Unit 单位: mm

Type: H3FF Part No.: H3FFH(amp rating)

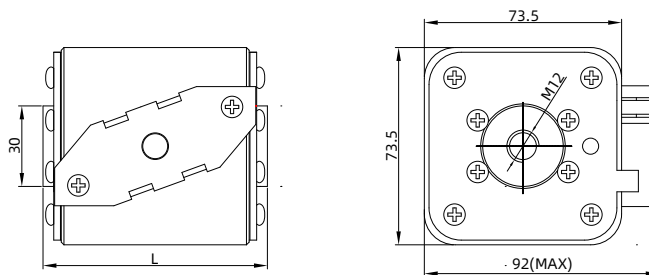

Type: H3FF Part No.: H3FFH(amp rating)B

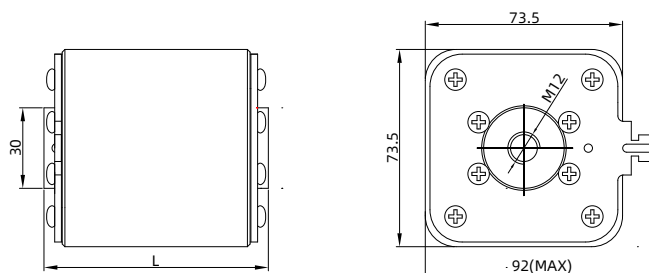

目录编号 PART NO.	可选配件 Optional Accessory 微动开关 Microswitches
H3FF(amp rating) H3FFH(amp rating)	HMC-01
H3FF(amp rating)B H3FFH(amp rating)B	HMT-01

目录编号 PART NO.	额定电流 Rated Current (A)	L (mm)
H3FFXXX	315-800	83
H3FFXXXB	900-1100	91
H3FFHXXX	900-1100	83
H3FFHXXXB		
H3FFHXXXC		

Type: H3FF Part No.: H3FFH(amp rating)C

