



HC14LgPV 1500V DC 1A-20A Photovoltaic Fuse 光伏熔断器



Standard/ 标准: UL 248-19


INTERRUPTING CAPACITY / 分断能力:

30,000 A at 1500V DC


Dimensions/ 尺寸:

Unit 单位: mm

Type: HC14LgPV Part No.: 14LgPV(amp rating)U15

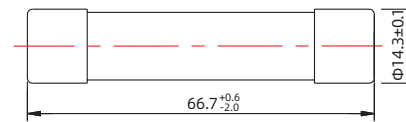


Part No.: 14LgPV(amp rating)U15-T

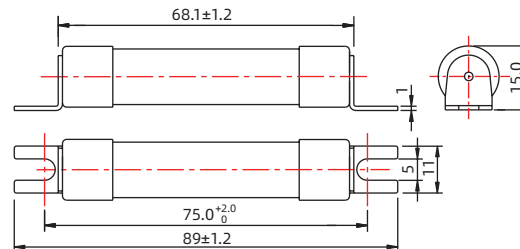

ELECTRICAL CHARACTERISTICS/ 电气特性:

% of CURRENT RATING 额定电流的 %	BLOWING TIME 熔断时间
135%	1 hour Max. 最慢 1 小时
200%	240 seconds Max. 最慢 240 秒

HC14LgPV 平均 I-T 曲线图 (仅供参考)
AVERAGE I-T CHARACTERISTICS CURVE
(FOR REFERENCE ONLY)

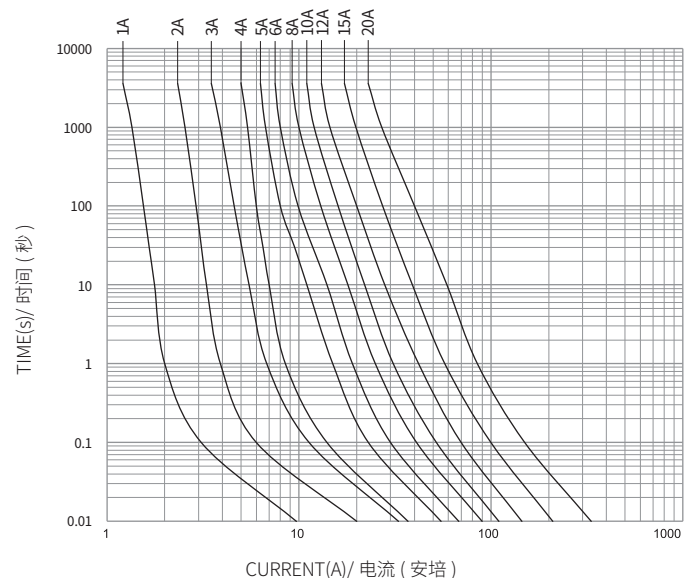

TECHNICAL PARAMETERS/ 技术参数:

PART NO. 目录编号	CURRENT RATING 额定电流	SAFETY APPROVALS 安全认证
		cULus
14LgPV1U15	1A	●
14LgPV1U15-T		●
14LgPV2U15	2A	●
14LgPV2U15-T		●
14LgPV2.5U15	2.5A	●
14LgPV2.5U15-T		●
14LgPV3U15	3A	●
14LgPV3U15-T		●
14LgPV4U15	4A	●
14LgPV4U15-T		●
14LgPV5U15	5A	●
14LgPV5U15-T		●
14LgPV6U15	6A	●
14LgPV6U15-T		●
14LgPV8U15	8A	●
14LgPV8U15-T		●
14LgPV10U15	10A	●
14LgPV10U15-T		●
14LgPV12U15	12A	●
14LgPV12U15-T		●
14LgPV15U15	15A	●
14LgPV15U15-T		●
14LgPV20U15	20A	●
14LgPV20U15-T		●

U15 DENOTES FOR 1500V DC

U15 表示 1500V DC

● DENOTES FOR APPROVAL

● 表示已取得安全认证

○ DENOTES FOR PENDING

○ 表示正在申请安全认证

Recommended fuse-base for 14.3mmx65mm fuses
See Model of product: HF-141A

适用于 14.3mmx65mm 熔断体的支持件
详见产品型号: HF-141A

