



# NH1LgG(-B) 1140V AC 50A-250A

Class of Operation: gG

保护特性: gG



Standard/ 标准: IEC 60269.1, GB/T 13539.1

### INTERRUPTING CAPACITY / 分断能力:


100,000 A at 1140V AC

### Dimensions/ 尺寸:

Unit 单位: mm


Type: NH1LgG

Part No.: NH1LgG (amp rating) U11A

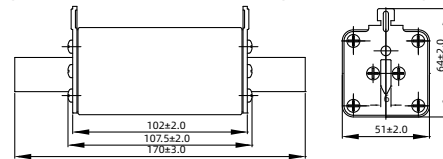


Type: NH1LgG-B

Part No.: NH1LgG (amp rating) U11B

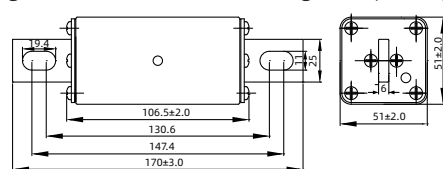


Type: NH1LgG-B

Part No.: NH1LgG (amp rating) U11BC

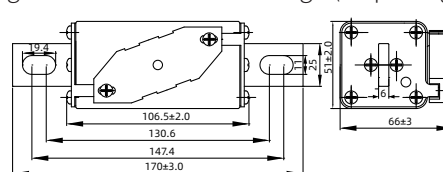

Type: NH1LgG-B

Part No.: NH1LgG (amp rating) U11BD

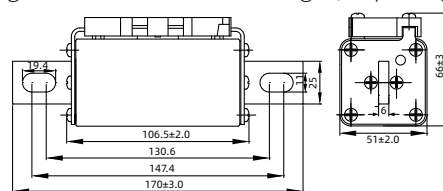

### TECHNICAL PARAMETERS/ 技术参数:

PART NO. 目录编号	CURRENT RATING 额定电流	SAFETY APPROVALS 安全认证	
		CCC	
NH1LgG50U11A	50A	●	●
NH1LgG50U11B			
NH1LgG50U11BC			
NH1LgG50U11BD			
NH1LgG63U11A	63A	●	●
NH1LgG63U11B			
NH1LgG63U11BC			
NH1LgG63U11BD			
NH1LgG80U11A	80A	●	●
NH1LgG80U11B			
NH1LgG80U11BC			
NH1LgG80U11BD			
NH1LgG100U11A	100A	●	●
NH1LgG100U11B			
NH1LgG100U11BC			
NH1LgG100U11BD			
NH1LgG125U11A	125A	●	●
NH1LgG125U11B			
NH1LgG125U11BC			
NH1LgG125U11BD			
NH1LgG160U11A	160A	●	●
NH1LgG160U11B			
NH1LgG160U11BC			
NH1LgG160U11BD			
NH1LgG200U11A	200A	●	●
NH1LgG200U11B			
NH1LgG200U11BC			
NH1LgG200U11BD			
NH1LgG250U11A	250A	●	●
NH1LgG250U11B			
NH1LgG250U11BC			
NH1LgG250U11BD			

U11DENOTES FOR 1140V AC

● DENOTES FOR APPROVAL

○ DENOTES FOR PENDING

U11 表示 1140V AC

● 表示已取得安全认证

○ 表示正在申请安全认证

### ELECTRICAL CHARACTERISTICS/ 电气特性:

Rated Current In(A) 额定电流 In(A)	CONVENTIONAL TIME(H) 约定时间	CONVENTIONAL CURRENT 约定电流	
		CONVENTIONAL NON-FUSING CURRENT(A) 约定不熔断电流	CONVENTIONAL FUSING CURRENT(A) 约定熔断电流
In ≤ 63	1		
63 < In ≤ 160	2	1.25In	1.6In
160 < In ≤ 400	3		

### NH1LgG 平均 I-T 曲线图 (仅供参考)

AVERAGE I-T CHARACTERISTICS CURVE (FOR REFERENCE)

