



# NH3XLaR 1500V DC 100A-630A

Class of Operation: aR

保护特性: aR



Standard/ 标准: UL 248-13, IEC 60269-4, GB/T 13539.4


**INTERRUPTING CAPACITY / 分断能力:**

250,000 A at 1500V DC


**Dimensions/ 尺寸:**

Unit 单位: mm


Type: NH3XLaR Part No.: 3XLaR(amp rating)U15

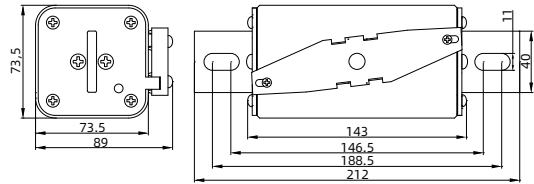

Type: NH3XLaR Part No.: 3XLaR(amp rating)U15B

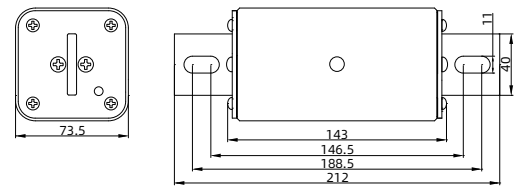

Type: NH3XLaR Part No.: 3XLaR(amp rating)U15C

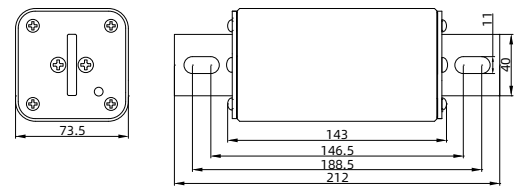

**TECHNICAL PARAMETERS/ 技术参数:**

PART NO. 目录编号	CURRENT RATING 额定电流	SAFETY APPROVALS 安全认证	
		cURus	TUV
3XLaR100U15	100A	●	○
3XLaR100U15B		●	○
3XLaR100U15C		●	○
3XLaR125U15	125A	●	○
3XLaR125U15B		●	○
3XLaR125U15C		●	○
3XLaR160U15	160A	●	○
3XLaR160U15B		●	○
3XLaR160U15C		●	○
3XLaR200U15	200A	●	○
3XLaR200U15B		●	○
3XLaR200U15C		●	○
3XLaR250U15	250A	●	○
3XLaR250U15B		●	○
3XLaR250U15C		●	○
3XLaR315U15	315A	●	○
3XLaR315U15B		●	○
3XLaR315U15C		●	○
3XLaR350U15	350A	●	○
3XLaR350U15B		●	○
3XLaR350U15C		●	○
3XLaR400U15	400A	●	●
3XLaR400U15B		●	●
3XLaR400U15C		●	●
3XLaR450U15	450A	●	●
3XLaR450U15B		●	●
3XLaR450U15C		●	●
3XLaR500U15	500A	●	●
3XLaR500U15B		●	●
3XLaR500U15C		●	●
3XLaR550U15	550A	●	●
3XLaR550U15B		●	●
3XLaR550U15C		●	●
3XLaR630U15	630A	●	●
3XLaR630U15B		●	●
3XLaR630U15C		●	●

B- 螺栓连接带中央指示器 Bolted with central indicator  
 C- 螺栓连接不带中央指示器 Bolted connection without central indicator  
 ● DENOTES FOR APPROVAL ● 表示已取得安全认证  
 ○ DENOTES FOR PENDING ○ 表示正在申请安全认证

**NH3XLaR 1500V 平均 I-T 曲线图 (仅供参考)**

NH3XLaR 1500V AVERAGE I-T CHARACTERISTICS CURVE (FOR REFERENCE)

