



61NM, 62NM UL C UL SR IEC PS JET KC

Φ6.35x32mm, RoHS Compliant & Pb-Free
GLASS TUBE FUSE (FAST BLOW)
 玻璃保险丝管 (速断型)

TECHNICAL PARAMETERS/ 技术参数:

PART NO. 目录编号	CURRENT RATING 额定电流	SAFETY APPROVALS 安全认证									REFERENCE (A ² Sec.) (RoHS) I ² T 参考值	
		UL(cUL)			UR/cUR		CSA		PSE			KC
		H	L	L1	H	L	H	L	H	L		H
61NM,62NM-0200H/L	200mA	●	●		●	●				●	0.00655	
61NM,62NM-0250H/L	250mA	●	●		●	●				●	0.0123	
61NM,62NM-0300H/L	300mA	●	●		●	●				●	0.0215	
61NM,62NM-0315H/L	315mA	●	●		●	●				●	0.0239	
61NM,62NM-0350H/L	350mA	●	●		●	●				●	0.0384	
61NM,62NM-0400H/L	400mA	●	●		●	●				●	0.0515	
61NM,62NM-0500H/L	500mA	●	●		●	●				●	0.112	
61NM,62NM-0600H/L	600mA	●	●		●	●				●	0.213	
61NM,62NM-0630H/L	630mA	●	●		●	●				●	0.239	
61NM,62NM-0750H/L	750mA	●	●		●	●				●	0.399	
61NM,62NM-0800H/L	800mA	●	●		●	●				●	0.504	
61NM,62NM-010H/L	1A	●	●		●	●	●	●	●	●	0.968	
61NM,62NM-012H/L	1.2A	●	●		●	●	●	●	●	●	1.751	
61NM,62NM-013H/L	1.25A	●	●		●	●	●	●	●	●	1.788	
61NM,62NM-015H/L	1.5A	●	●		●	●	●	●	●	●	3.565	
61NM,62NM-016H/L	1.6A	●	●		●	●	●	●	●	●	4.026	
61NM,62NM-020H/L	2A	●	●		●	●	●	●	●	●	8.57	
61NM,62NM-025H/L	2.5A	●	●		●	●	●	●	●	●	14.21	
61NM,62NM-030H/L	3A	●	●		●	●	●	●	●	●	23.12	
61NM,62NM-032H/L	3.15A	●	●		●	●	●	●	●	●	25.70	
61NM,62NM-035H/L	3.5A	●	●		●	●	●	●	●	●	32.15	
61NM,62NM-040H/L	4A	●	●		●	●	●	●	●	●	43.65	
61NM,62NM-050H/L	5A	●	●		●	●	●	●	●	●	72.54	
61NM,62NM-060H/L	6A	●	●		●	●	●	●	●	●	120.2	
61NM,62NM-063H/L	6.3A	●	●		●	●	●	●	●	●	168.7	
61NM,62NM-070H/L	7A	●	●		●	●	●	●	●	●	195.3	
61NM,62NM-080H/L	8A	●	●		●	●	●	●	●	●	393.0	
61NM,62NM-090H/L	9A	●	●		●	●	●	●	●	●	476.5	
61NM,62NM-100H/L	10A	●	●		●	●	●	●	●	●	556.9	
61NM,62NM-120H/L/L1	12A			●				●	●		805.9	
61NM,62NM-150H/L/L1	15A			●				●	●		1868	
61NM,62NM-160H/L/L1	16A			●				●	●		2196	
61NM,62NM-200H/L/L1	20A			●				●	●		3212	
61NM,62NM-250H/L/L1	25A			●				●	●		5902	
61NM,62NM-300H/L/L1	30A			●				●	●		8494	

● DENOTES FOR APPROVED ● 表示已取得安全认证
 H DENOTES FOR 250V H 表示 250V
 L DENOTES FOR 125V L 表示 125V
 L₁ DENOTES FOR 32V L₁ 表示 32V

ELECTRICAL CHARACTERISTICS/ 电气特性:

% of CURRENT RATING 额定电流的 %	BLOWING TIME 熔断时间
100%	4 hours Min. 最快 4小时
135%	1 hour Max. 最慢 1小时
200%	5 seconds Max. 最慢 5秒

Standards/ 标准: UL 248-1, UL 248-14

Operating Temperature/ 工作温度: -55°C ~125°C

Storing Temperature/ 储存温度: -55°C ~85°C

Resistance to soldering heat/ 耐焊接热性: 260°C, 10s Max.


Solderability/ 可焊性: 245°C ±5°C, 5s±0.5s

INTERRUPTING CAPACITY / 分断能力:

- 10,000 amperes at 125V AC (32mA-10A)
- 35 amperes at 250V AC (32mA-1A)
- 100 amperes at 250V AC (1.2A-3.5A)
- 200 amperes at 250V AC (4A-10A)
- 100 amperes at 125V AC (1A-30A) PSE (61NM)
- 500 amperes at 125V AC (1A-15A) PSE (62NM)
- 100 amperes at 125V AC (16A-30A) PSE (62NM)
- 100 amperes at 250V AC (1A-30A) PSE (61NM/62NM)
- 100 amperes at 250V AC (100mA-10A) KC
- 300 amperes at 32V AC/DC (12A-30A) UR/cUR

Dimensions/ 尺寸:

Unit 单位: mm

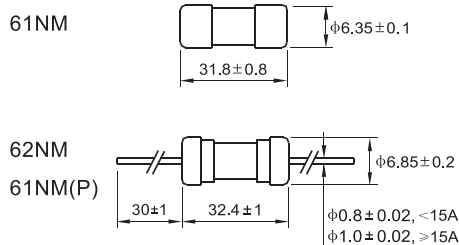

**61NM/62NM AVERAGE I-T CHARACTERISTICS CURVE
 (FOR REFERENCE ONLY)**

61NM/62NM 平均 I-T 曲线图 (仅供参考)

